



**8" FHD HDR LCD MONITOR**

KVM-0861W, a portable 8 inch monitor with 1920x1200 FHD resolution. Integrated 3D LUT color calibration technology, selectable different color space, 3rd party LUT files import. Built-in waveform, false color, focus assist etc features, makes it a nice choice for shooting etc applications



**Accessory**



Power Adaptor (Standard)




DV Battery Plate (Standard)



Magic Arm (Optional)

**Main Body**

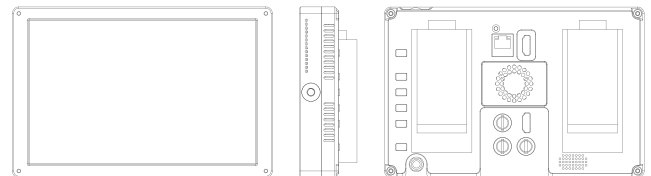

**LCD Panel**

Model No.	KVM-0861W
Backlight	LED
Size	8"
Resolution	1920x1200
Aspect Ratio	16 : 10
Viewing Angle	160°(H) / 160°(V)
Color Depth	16.7M
Brightness	290cd/m <sup>2</sup>
Contrast Ratio	900:1

**Input**

2 x BNC	SDI 1/2 signal inputs <i>(Auto-detected and compatible to 3G/HD/SD-SDI)</i>
1 x BNC	Composite Video input <i>(Share with SDI 1 input BNC)</i>
1 x HDMI	HDMI input

**Output**


1 x BNC	SDI signal output <i>(3G/HD/SD-SDI auto-detected)</i>
1 x HDMI	HDMI output

**Specifications**

- 8 inch 1920x1200 resolution
- 2 x 3G/HD/SD-SDI inputs
- Supports 4:4:4 SMPTE425-AB signal
- 1 x 3G/HD/SD-SDI output, 1 x HDMI input & output
- 1 x Video input (share with SDI1 input BNC)
- Color Space (REC709/ EBU/ DCI-P3 D65/ DCI-P3/ REC2020/ Bypass/ User1/ User2)
- Support user 3D LUT files import
- HDR: PQ (ST2084), HLG (1.0, 1.1, 1.2, 1.3, 1.4, 1.5)
- Various Gamma selection: Gamma 2.0, 2.2, 2.4, 2.6
- Waveform, False Color, Focus Assist, Zebra
- Aspect Ratio, Safe & Area Marker, UMD
- Time Code, Blue/Mono Only
- Darkness Check, Video Freeze, Fast Mode
- Picture Flip, PIP/PBP
- 16CH SDI & 2CH HDMI embedded audio
- Dynamic & Static UMD
- IMD Tally Display (TSL V3.1/4.0/5.0)
- 3.5mm headset jack, Tally Indicator(Back)
- Aluminum Alloy Casing

### High Dynamic Range(HDR)

Konvision KUM 4K, 8K and KVM-6X series support HDR display. Adjustable HDR modes include PQ(ST2084), HLG with Rec 2020 color gamut. It reproduces a greater dynamic range of luminosity and provides extremely high level picture quality.

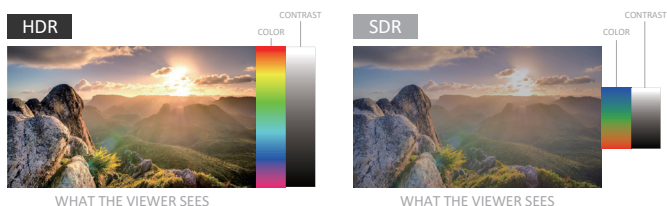

### Darkness Check

Increasing the brightness and contrast ratio in the dark areas, Darkness Check can show more shadow details of the input signal. Darkness Check can be used for double checking the shadow detail of the dark areas to avoid any missing information.



### PIP & PBP

It supports PIP and PBP for one SDI signal with the other signal (Video/ Component/ HDMI/ DVI/ VGA). The two images can swap freely between each other.




### False Color

Check exposure of the image. Blue, cyan, green, yellow, orange and red color be displayed in turn to show the luminance or brightness values of the image from darkest to brightest, enables an achievement of proper exposure without applying external test equipment.




### Focus Assist

Focus assist aids the camera operator in obtaining the sharpest possible picture, it will mark with red color where the sharp edges appear on the screen.

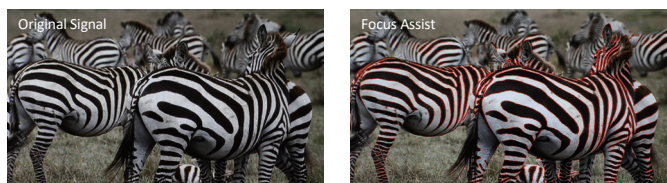

### 3D LUT Color Calibration

Compatible with ColourSpace and Calman calibration software, Konvision monitors apply K10-A probe (professional level) to achieve a precise color. Monitor's also workable with universal colorimeters including CA210, CA310, CS200, CR100, CR250, X-Rite i1 Display.

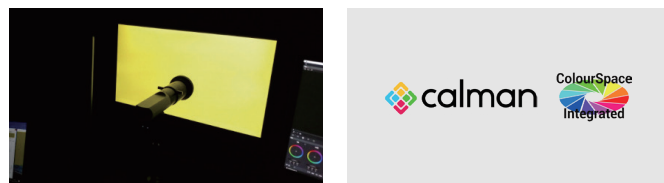


### 3D LUT files import

With the LUT loading function, users can load 2 different 3D LUT files with different color types according to their own needs, making DIT, post production and grading work simpler and more intuitive, optimizing the work flow and improving work efficiency.




### Picture Flip

Horizontal picture flip function allows negative image, is very useful in the studios/ virtual studios, such as weather forecast, news and other programs, etc.

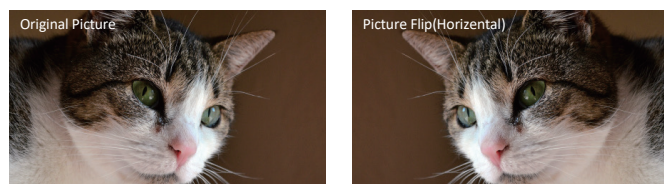

### Zebra

Display the overexposed areas (too bright) of the image with zebra stripes, aids the camera operator to control the luminance, in order to avoid overexposure. This feature is very effective for proper exposure.

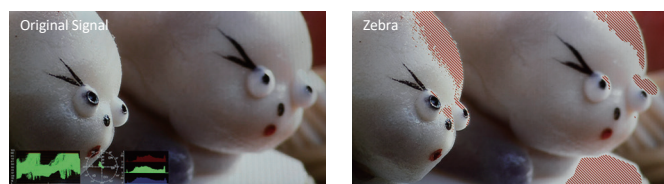

Audio In & Out	
SDI/HDMI Audio In	16 Channels SDI/2 Channels HDMI embedded audio
Audio Meter Display	Vertical/Horizontal audio level meter display
Audio Headset Output	3.5mm headset jack
Built-in Speaker	2.0W×1
GENERAL	
Input Voltage	DC 8.4 V - 16.8 V
Power Consumption	18 W
Power-Saving Mode	Turn off unimportant key automatically if no signal input
Accessory	Power adaptor

Specifications may be changed without prior notice.