



8K Signal



Native 4K Resolution



High Dynamic Range



P3 Gamut 98% Coverage



SDI SFP Module

## 27" 8K HDR P3 PREMIUM MONITOR

KUM-2720QD is a 27" 8K HDR reference monitor with 1000 Nits ultra high brightness, 10BIT IPS panel covers up to 98% P3 wider color gamut. Supporting 12G-SDI and 3G-SDI signals, built-in HDMI 2.0 interface, upto 8192 x 4320 60P signal. Quad display supports 4 different format 4K/HD/SD signals on different windows at same time, ideal for 4K,8K studio, high-end color grading and film productions.



12G-SDI



BT.2020



Waveform



VectorScope



Focus Assist



Audio Meter



False Color



Zebra





TSL UMD



GPI

LCD Panel	
Model No.	KUM-2720QD
Backlight	LED,98% P3
Size	27"
Resolution	3840x2160
Aspect Ratio	16 : 9
Viewing Angle	178°(H) / 178°(V)
Color Depth	1.07B
Brightness	1000cd/m <sup>2</sup>
Contrast Ratio	1400:1
Input	
4 x BNC	12G-SDI 1/2/3/4 signal inputs <i>(Auto-detected and compatible to 6G/3G/HD/SD-SDI)</i>
1 x SDI SFP	SDI SFP input cage
1 x HDMI 2.0	HDMI 2.0 signal input
Output	
4 x BNC	12G-SDI 1/2/3/4 signal outputs <i>(Auto-detected and compatible to 6G/3G/HD/SD-SDI)</i>

## Main Body Dimensions

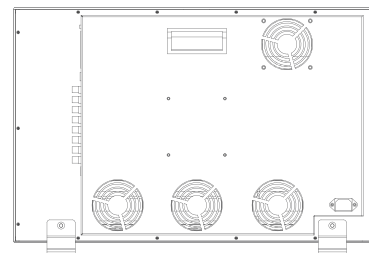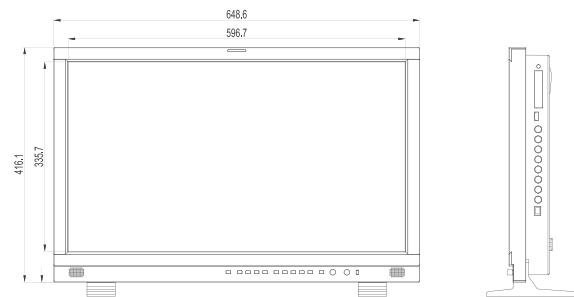

Main Body:648.6x416.1x88.5(mm)  
Weight: 9.80KG  
□ Without Stand

## Specifications


- 3840x2160 4K resolution,10Bit LCD panel
- 1000 Nits high brightness
- Support 8K SDI signal 8192x4320 resolution
- 12 Bit Video Processing,image no delay
- 4x12G-SDI inputs and outputs(6G/3G/HD/SD-SDI auto detect)
- 12G-SDI quad link 8K SDI signal supports 8192x4320 60P
- 12G-SDI single link 4K SDI signal supports 4096x2160 60P
- 1x HDMI 2.0 input, 1x SDI SFP Input cage
- 4K/HD signal support Payload ID function
- 4K Mode,Quad-Split Mode,FHD single picture mode
- Quad-View: 4x SDI/HDMI formats mixed inputs with different frequency rate
- 4K/8K signal supports 2 Sample Interleave (2SI) and Square Division (SQD)
- HDR supports PQ (ST2084) , HLG(1.0,1.1, 1.2, 1.3, 1.4, 1.5)
- SDR and HDR comparison
- Ethernet Remote control

- 3D LUT Color calibration with LightSpace & CalMAN
- Support user 3D LUT files import
- Color space: REC709/EBU/DCI-P3 D65/DCI-P3/REC2020/ USER1/USER2/Bypass
- Various Gamma selection: Gamma 2.0, 2.2, 2.4, 2.6
- Various cameras' SDR Log curves: SONY S-log1/2/3 (709), ARRI Log-C (709), Canon C-log1/2/3(709) etc
- Various cameras' HDR Log curves:SONY S-log1/2/3 (HLG), S-log1/2/3 (PQ), ARRI Log-C (HLG), Log-C (PQ)
- 4K HDR Waveform,Vectorscope,Black Stretch
- Picture Flip,Focus Assist
- False Color,Zebra
- Scan,Markers
- Blue/Mono Only
- Audio Level Meter
- Dynamic UMD(TSL3.1/4.0)

# Main Features

## - 8K Signal, Native 4K Resolution

Supporting 8192x4320 8K signal, including 4320p 23.98,24, 25,29.97, 30,50,59.94 and 60p. With advance image processing, 8K HDR monitor restores a real world for eyes.

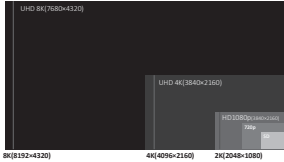


## - 3D LUT Color Calibration

Compatible with Lightspace and Calman calibration software, Konvision monitors apply K10-A probe (professional level) to achieve a precise color. Monitor's also workable with universal colorimeters including CA2110, CA310, CS200, CR100, CR250, X-Rite i1 Display.



## - High Dynamic Range (HDR)

Konvision KUM 4K, 8K and KVM-6X series support HDR display. Adjustable HDR modes include PQ (ST2084), HLG with Rec 2020 color gamut. It reproduces a greater dynamic range of luminosity and provides extremely high level picture quality and image reproduction.

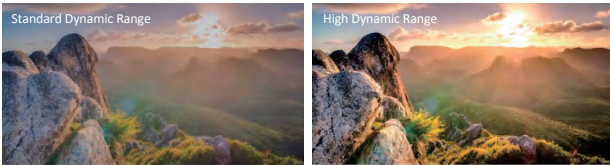


## - SQD and 2SI 4K signal

4K 2 Sample Interleave (2SI) : Pixel based segmentation



4K Square Division (SQD) : Quadrant based segmentation

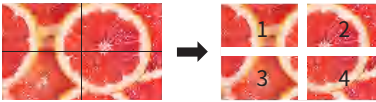

## - Quad View Mode

You can input 4x independent SDI sources or 3x independent SDI sources and 1x HDMI source to quadview, support different SDI or HDMI format mixed inputs with different frequency rate.



## - EOTF Curve Conversions

Konvision KUM 4K, 8K and KVM-6X series supports a variety of EOTF curve conversion applicable to the broadcast industry and digital film standard. A preset of lots of HDR log, SDR logs and gamma curve selection, so as to realize the perfect combination with the camera system.



## - Black Stretch

Increasing the brightness and contrast ratio in the dark areas, Black Stretch function can show more shadow details of the input signal. Black Stretch can be used for double checking the shadow detail of the dark areas to avoid any missing information.




## - Motion-Adaptive Interlace to Progressive

Realizing quick response of the fast moving image, avoids dizzy, saw tooth and other problems, ensures clearer and smoother image, well-satisfied high-end demanding workflows such as live sports, camera shaking and rolling subtitles etc.




## - HDR & SDR Comparison

Konvision 8K and 4K monitors offer HDR & SDR side by side comparison. This function allows customers to compare the difference between HDR and SDR on the same screen. It allows users to see more picture details and color in scene.

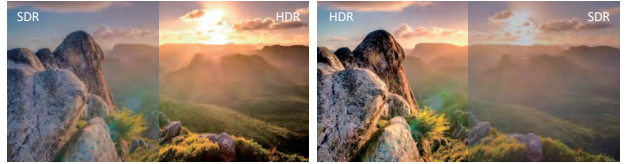


## - 4K HDR Waveform (Alarm), Vectors

4K HDR Waveform. Both SDI and HDMI support Waveform, Vectorscope, Histogram and manage to be displayed on screen at the same time. When luminance reaches or exceeds the preset value, the over exposure areas will be red marked (Waveform Alarm).

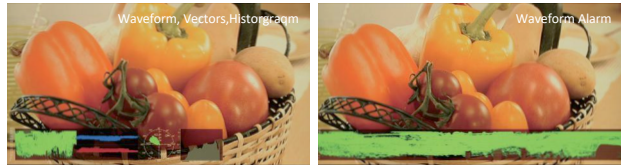


## - False Color

Check exposure of the image. Blue, cyan, green, yellow, orange and red color be displayed in turn to show the luminance or brightness values of the image from darkest to brightest, enables an achievement of proper exposure without applying external test equipment.

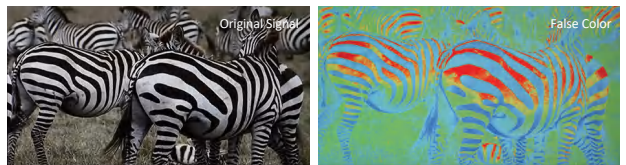


## - Focus Assist

Focus assist aids the camera operator in obtaining the sharpest possible picture, it will mark with red color where the sharp edges appear on the screen.

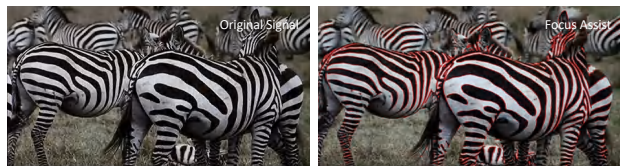

## - Zebra

Display the overexposed areas (too bright) of the image with zebra stripes, aids the camera operator to control the luminance, in order to avoid overexposure. This feature is very effective for proper exposure.

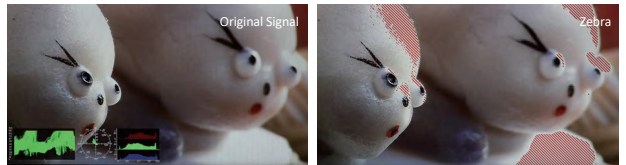

## Audio In & Out

SDI/HDMI Audio In	16 Channels SDI/2 Channels HDMI embedded audio
Audio Meter Display	Vertical/Horizontal audio level meter display
Audio Headset Output	3.5mm headset jack
Built-in Speaker	2.5W×2

## GENERAL

Input Voltage	AC 100-240V 50/60Hz
Power Consumption	120 W
VESA Installation	VESA MIS-D (100×100mm)
Accessory	Power Cord/Desktop stand

Specifications may be changed without prior notice.