



Native Resolution



3G-SDI Signal



High Dynamic Range

24" FHD HDR QUAD SPLIT LCD MONITOR

KQM-2461W is a 24inch multi-functional monitor that supports full video formats. It provides with waveform, vector scope, audio meter and so on professional broadcast features. Efficient features make it a nice choice for color grading, production, post-production and editing, as well as studio and OB truck.



2K



3G-SDI



BT.709



Waveform



Vectors



Pixel Measure



Zebra



Focus Assist



False Color



Audio Meter






TSL UMD



GPI

LCD Panel	
Model No.	KQM-2461W
Backlight	LED
Size	24"
Resolution	1920×1080
Aspect Ratio	16 : 9
Viewing Angle	178°(H) / 178°(V)
Color Depth	16.7M
Brightness	250cd/m ²
Contrast Ratio	1000:1
Input	
4 x BNC	3G-SDI 1/2/3/4 Signal Inputs <i>(3G/HD/SD-SDI Auto-Detected)</i>
4 x DVI-D	Support DVI/HDMI Signal
Output	
4 x BNC	3G-SDI 1/2/3/4 Signal Outputs <i>(3G/HD/SD-SDI Auto-Detected)</i>

Main Body



Specifications

- 24" 1920×1080 native resolution
- 12 Bit video processing
- 3D LUT Color calibration with LightSpace & CalMAN
- 4x3G/HD-SDI inputs, 4x3G/HD-SDI outputs
- 4xDVI/HDMI inputs
- 4K mode, Quad-Split mode, FHD single picture mode
- Waveform, Vectorscope

- Picture Flip, Focus Assist
- False Color, Zebra
- Scan, Markers, Blue Only/Mono
- Audio Meter
- Dynamic UMD, TSL 3.1/4.0
- Built-in DC in and AC in
- Ethernet/GPI

Main Features

- 3D LUT Color Calibration

Compatible with Lightspace and Calman calibration software, Konvision monitors apply K10-A probe (professional level) to achieve a precise color. Monitor's also workable with universal colorimeters including CA210, CA310, CS200, CR100, CR250, X-Rite i1 Display.




Calibration Softwares:




- Waveform(Alarm), Vectors

Both SDI and HDMI support Waveform, Vectorscope, Histogram and manage to be displayed on screen at the same time. When luminance reaches or exceeds the preset value, the over exposure areas will be red marked (Waveform Alarm).

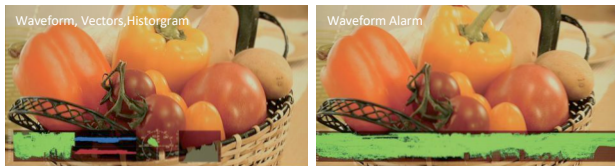


- Black Stretch

Increasing the brightness and contrast ratio in the dark areas, Black Stretch function can show more shadow details of the input signal. Black Stretch can be used for double checking the shadow detail of the dark areas to avoid any missing information.

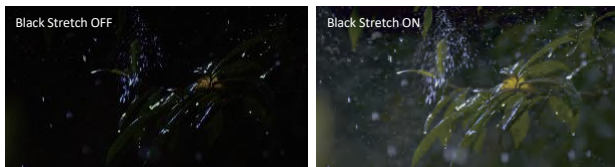


- Part Zoom In

Part Zoom in function allows user Zoom In any part of the picture, to watch picture details more clearly, and assist for focus.

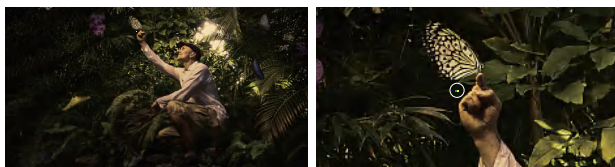


- PIP & PBP

Images of two SDI signals manage to display on screen at the same time. It also supports PIP and PBP for one SDI signal with the other signal (Video/Component/HDMI/DVI/VGA). The two images can swap freely between each other.

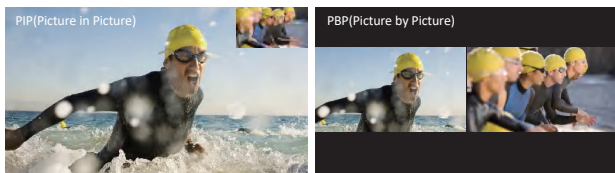


- Picture Flip

Horizontal picture flip function allows negative image, is very useful in the studios/virtual studios, such as weather forecast, news and other programs, etc.

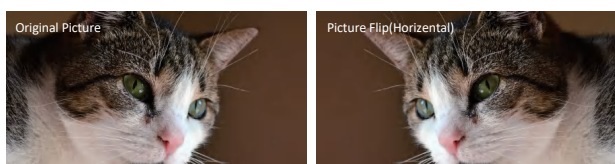


- False Color

Check exposure of the image. Blue, cyan, green, yellow, orange and red color be displayed in turn to show the luminance or brightness values of the image from darkest to brightest, enables an achievement of proper exposure without applying external test equipment.

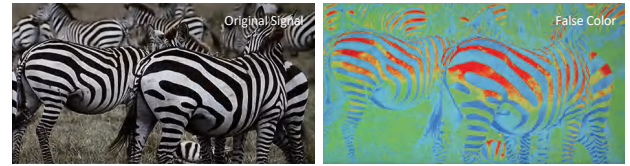


- Focus Assist

Focus assist aids the camera operator in obtaining the sharpest possible picture, it will mark with red color where the sharp edges appear on the screen.

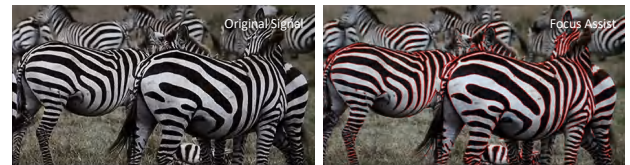


- Zebra

Display the overexposed areas (too bright) of the image with zebra stripes, aids the camera operator to control the luminance, in order to avoid overexposure. This feature is very effective for proper exposure.

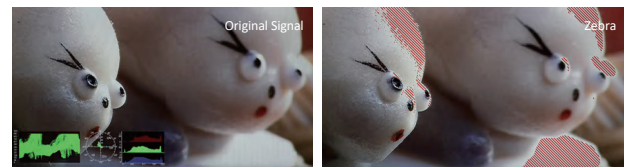

- Pixel Measurement

Select any single pixel or block of pixels by using a movable cross-hair to obtain real time readouts of the Y&RGB values of the selected position. This function is to get real time Y&RGB measurement values of any point of the input signals and compare the values of any two points.

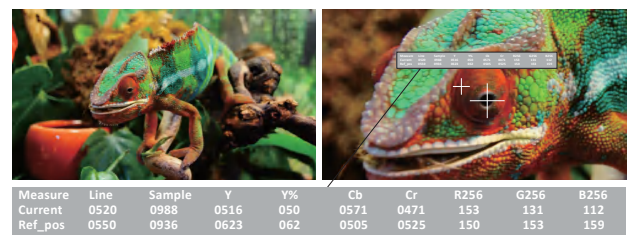

Audio In & Out

SDI/HDMI Audio In	16 Channels SDI/2 Channels HDMI embedded audio
Audio Meter Display	Vertical/Horizontal audio level meter display
Audio Headset Output	3.5mm headset jack
Built-in Speaker	2.5W x 2

GENERAL

Input Voltage	DC 12V and AC 100-240V 50/60Hz
Power Consumption	55 W
Power-Saving Mode	Turn off unimportant key automatically if no signal input
VESA Installation	VESA MIS-D (100x100mm)
Accessory	Power Cord /Desktop stand

Specifications may be changed without prior notice.