






**24" FHD HDR PREMIUM P3 GRADING MONITOR**

KVM-2460D, 24inch IPS LCD panel with 1920x1200 native resolution, covers up to 98% P3 wider color gamut, high brightness, high contrast ratio. 3D LUT color calibrated, user can import their own LUT files. Provided with Waveform(alarm), Vectors, Pixel Measurement, Audio Phase and more other professional features. HDR display supports PQ and HLG. A good choice for most demanding applications of image quality for high-end broadcast shooting, editing and production.



| LCD Panel      |   |
|----------------|---|
| Model No.      | KVM-2460D   |
| Backlight      | LED,98%P3   |
| Size           | 24"   |
| Resolution     | 1920x1200   |
| Aspect Ratio   | 16 : 10   |
| Viewing Angle  | 178°(H) / 178°(V)   |
| Color Depth    | 1.07B   |
| Brightness     | 400cd/m <sup>2</sup>  |
| Contrast Ratio | 1500:1  |
| Input          |   |
| 2 x BNC        | SDI 1/2 signal inputs<br><i>(Auto-detected and compatible to 3G/HD/SD-SDI)</i>  |
| 3 x BNC        | YPbPr/Video/Y/C inputs  |
| 1 x HDMI       | HDMI input  |
| 1 x DVI-I      | DVI/VGA inputs  |
| Output         |   |
| 2 x BNC        | SDI 1/2 signal outputs<br><i>(Auto-detected and compatible to 3G/HD/SD-SDI)</i> |
| 3 x BNC        | YPbPr/Video/Y/C outputs   |

**Main Body**



**Specifications**

- 1920x1200 resolution, 10 Bit LCD panel
- 12 Bit Video Processing, image no delay
- 3G-SDI 4:4:4 12bit signals (SMPTE 425M A/B)
- 2x2K/3G-SDI inputs and outputs(2K/3G/HD/SD-SDI auto detect)
- 1x DVI-D input,1x HDMI input, 1x composite video input
- HDR supports PQ (ST2084) and HLG(1.0,1.1, 1.2, 1.3, 1.4, 1.5)
- Part Zoom In
- Black Lift function
- H/V Delay, Over Scan, Markers
- Audio Level Meter, Blue/Mono Only
- Remote control: Ethernet/GPI, RS422 In/Out
- Dynamic UMD(TSL3.1/4.0), Time Code Display
- LED Tally Light and On-screen Tally display
- F-key configuration and Key Lock function
- Built-in AC in and DC in power supply

- 3D LUT Color calibration with LightSpace & CalMAN
- Color space: REC709/EBU/DCI-P3 D65/DCI-P3/REC2020/ USER1/USER2/Bypass
- Support user 3D LUT files import
- Various Gamma selection: Gamma 2.0, 2.2, 2.4, 2.6
- Various cameras' SDR Log curves: SONY S-log1/2/3 (709), ARRI Log-C (709), Canon C-log1/2/3(709) etc
- Various cameras' HDR Log curves:SONY S-log1/2/3 (HLG), S-log1/2/3 (PQ), ARRI Log-C (HLG), Log-C (PQ)
- Waveform, Vectorscope for SDI1 and SDI2
- Waveform, Vectorscope for HDMI/DVI
- Pixel Measurement and Audio Phase
- PBP/PIP(size/position adjustable)
- Picture Flip, Focus Assist
- False Color, Zebra

## High Dynamic Range(HDR)

Konvision KUM 4K, 8K and KVM-6X series support HDR display. Adjustable HDR modes include PQ(ST2084), HLG with Rec 2020 color gamut. It reproduces a greater dynamic range of luminosity and provides extremely high level picture quality.



## EOTF Curve Conversions

Konvision KUM 4K, 8K and KVM-6X series supports a variety of EOTF curve conversion applicable to the broadcast industry and digital film standard. A preset of lots of HDR log, SDR logs and gamma curve selection, so as to realize the perfect combination with the camera system.



## Part Zoom In

Part Zoom in function allows user Zoom In any part of the picture, to watch picture details more clearly, and assist for focus.



## Black Lift

Increasing the brightness and contrast ratio in the dark areas, Black Lift function can show more shadow details of the input signal. Black Lift can be used for double checking the shadow detail of the dark areas to avoid any missing information.




## PIP & PBP

It supports PIP and PBP for one SDI signal with the other signal (Video/Component/HDMI/DVI/VGA). The two images can swap freely between each other.




## Picture Flip

Horizontal picture flip function allows negative image, is very useful in the studios/virtual studios, such as weather forecast, news and other programs, etc.

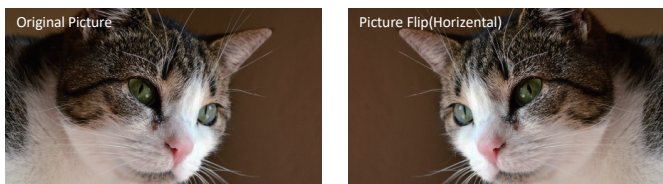


## Pixel Measurement

Select any single pixel or block of pixels by using a movable cross-hair to obtain real time readouts of the Y&RGB values of the selected position. This function is to get real time Y&RGB measurement values of any point of the input signals and compare the values of of any two points.

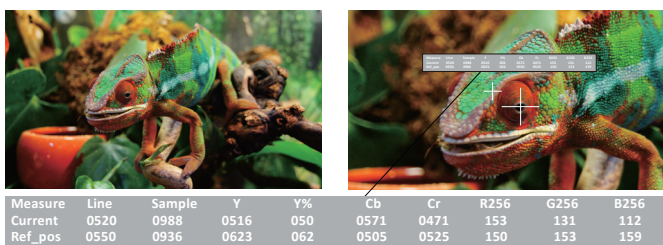

## 3D LUT Color Calibration

Compatible with Lightspace and Calman calibration software, Konvision monitors apply K10-A probe(professional level) to achieve a precise color. Monitor's also workable with universal colorimeters including CA210, CA310, CS200, CR100, CR250, X-Rite i1 Display.

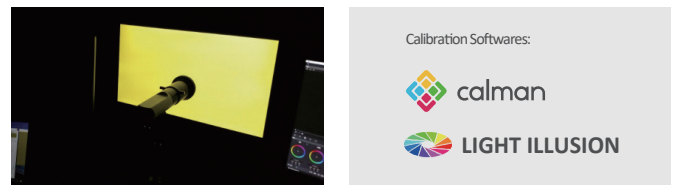

## 3D LUT files import

With the LUT loading function, users can load 2 different 3D LUT files with different color types according to their own needs, making DIT, post production and grading work simpler and more intuitive, optimizing the work flow and improving work efficiency.



## Waveform(Alarm), Vectors

Both SDI and HDMI support Waveform, Vectorscope, Histogram and manage to be displayed on screen at the same time. When luminance reaches or exceeds the preset value, the over exposure areas will be red marked(Waveform Alarm).




## False Color

Check exposure of the image. Blue, cyan, green, yellow, orange and red color be displayed in turn to show the luminance or brightness values of the image from darkest to brightest, enables an achievement of proper exposure without applying external test equipment.




## Focus Assist

Focus assist aids the camera operator in obtaining the sharpest possible picture, it will mark with red color where the sharp edges appear on the screen.

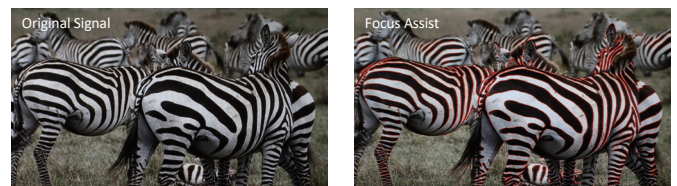

## Zebra

Display the overexposed areas(too bright) of the image with zebra stripes, aids the camera operator to control the luminance, in order to avoid overexposure. This feature is very effective for proper exposure.

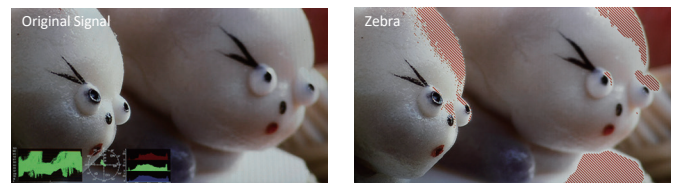

| Audio In & Out       |   |
|----------------------|---|
| SDI/HDMI Audio In    | 16 Channels SDI/2 Channels HDMI embedded audio            |
| Audio Meter Display  | Vertical/Horizontal audio level meter display             |
| Audio Headset Output | 3.5mm headset jack  |
| Built-in Speaker     | 2.5W×2  |
| GENERAL              |   |
| Input Voltage        | DC 12V and AC 100-240V 50/60Hz                            |
| Power Consumption    | 55 W  |
| Power-Saving Mode    | Turn off unimportant key automatically if no signal input |
| VESA Installation    | VESA MIS-D (100×100mm)                                    |
| Accessory            | Power Cord /Desktop stand                                 |

α Specifications may be changed without prior notice.