



## 4x4.2" 3G-SDI QUAD RACK-MOUNT LCD MONITOR

KRM-404A, 4x4.2" 2RU quad rack-mount monitor, IPS LCD panels with 1280x768 high resolution, wide viewing angle, high brightness and high contrast ratio. It supports full screen waveform, vectors, audio meter display.



## Main Body




## Specifications

- 1280 x 768 high resolution, IPS LCD panel
- 1x3G/HD-SDI in and for each screen
- Composite Video/HDMI input
- Waveform, Vector scope
- Markers, Time Code
- Scan, Blue Only/Mono
- Audio Meter
- Dynamic UMD TSL3.1/4.0
- Nice Aluminum Alloy Casing
- Ethernet
- Tally light

## Main features

- **Various Markers**  
Markers, UMD, Audio Meter, Time Code.

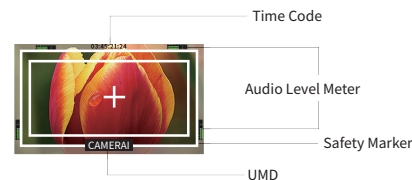

- **Waveform(Alarm), Vectors**

Support Waveform, Vector scope, and manage to be displayed on screen at the same time. When luminance reaches or exceeds the preset value, the over exposure areas will be red marked (Waveform Alarm).



LCD Panel	
Model No.	KRM-404A
Backlight	LED
Size	4x4.2"
Resolution	1280x768
Aspect Ratio	16 : 10
Viewing Angle	160°(H)/160°(V)
Color Depth	16.7M
Brightness	500cd/m <sup>2</sup>
Contrast Ratio	1000:1
Input (Each Screen)	
1 x BNC	SDI signal input <i>(Auto-detected and compatible to 3G/HD/SD-SDI)</i>
1 x BNC	Video signal input(Share with SDI BNC)
1 x HDMI	HDMI input
Output (Each Screen)	
1 x BNC	SDI signal output <i>(Auto-detected and compatible to 3G/HD/SD-SDI)</i>
Audio In & Out	
SDI Audio In	8 Channels Embedded Audio
Audio Meter Display	Vertical/Horizontal audio level meter display
Audio Headset Output	3.5mm headset jack
Built-in Speaker	2.5Wx2
General	
Input Voltage	DC 12V
Power Consumption	40 W
VESA Installation	19" EIA Rack 2RU
Accessory	Power Cord /Rackmount Brackets

Specifications may be changed without prior notice.