


# KUM-2720H

## 27 INCH

### 12G-SDI 4K/8K HDR MONITOR

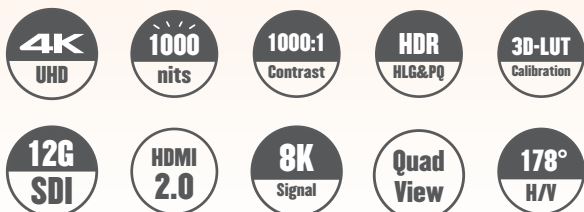

## INTRODUCTION

KUM-2720H features a 27-inch 4K/UHD resolution( 3840×2160 ) IPS LCD panel, with 10-bit color and 1000nits brightness. HDR supports HLG & PQ, with 4x12G-SDI input/output and is compatible with 8K signals. It also includes HDMI 2.0 and SFP+ optical module interfaces, supporting SD/H-D/4K input along with conversion from 4K HDR to HD SDR. Built-in waveform and vector scope analysis tools ideal for studios, OB vans, and live program production.

## HIGHLIGHTS

- 178°H/V viewing angle, IPS LCD panel, 3840×2160 resolution
- 12-bit video signal processing with zero delay display
- 4x12G-SDI inputs and outputs, 8K quad-link, 4K single-link&quad-link
- 4x12G SQD & 2SI formats support 8K60P signals
- 1xSFP+ optical module interface, supporting SDI conversion input
- 1xHDMI 2.0 input & loop-out, supporting SDI/SFP+ conversion output
- 3D LUT color calibration support for ColourSpace & Calman
- Supports color spaces: Rec.709/EBU/DCI-P3/DCI-P3 D65/Rec.2020
- Multiple gamma options: Gamma 2.0/2.2/2.4/2.6
- HDR support: HLG (1.03/1.11/1.16/1.20/1.27/1.33), ST2084 PQ/(softroll)
- VPID reading & Payload ID recognition, auto-match gamut & EOTF
- Camera Gammas & EOTF to Standard Gamuts Conversion
- USB/network ports for custom LUT files loading & firmware upgrading
- Quad view mode for simultaneous SDI/HDMI/SFP+signals
- Independent Gamuts & EOTF settings in quad view mode
- Any window in quad view mode can quickly switch to single view mode
- 4K HDR to 2K SDR down-conversion, custom 3D LUT output
- HDR area display, HDR/SDR ratio graph and pixel measurement
- Waveform, Vector, Histogram, CIE Chromaticity Diagram, CIE Color Volume
- Mirror, Rotation, Zoom, Freeze, Full Scan, Overscan, H/V delay
- False Color, Zebra, Focus Assist, Blue/Mono Only
- Darkness Check, Highlight Check
- Aspect ratio, Center Marker, Safe Area, Markers with BOX control
- Audio Level Meter, Audio Phase, 5.1/7.1 Surround Phase
- Each SDI support 16ch Embedded Audio Meters & 2-channel outputs
- Supports 4.1-channel audio
- VITC1/2, LTC Time Code, Static/Dynamic UMD/IMD display, Tally lights
- 5 Scene Presets, S1-S5 Shortcut keys, supporting custom settings
- GPI remote control for Tally, Auxiliary functions, and scene presets
- Supports 608/708 Closed Caption
- Aluminum alloy, Build-In Speakers
- 3.5mm Headphone Jack, Volume adjustment

## SPECIFICATION

| Panel               |                                                                  |
|---------------------|------------------------------------------------------------------|
| Model No.           | KUM-2720H                                                        |
| Backlight           | LED                                                              |
| Size                | 27"                                                              |
| Resolution          | 3840×2160                                                        |
| Aspect Ratio        | 16:9                                                             |
| Viewing Angle       | 178°(H) / 178°(V)                                                |
| Brightness          | 1000cd/m <sup>2</sup>                                            |
| Contrast Ratio      | 1000:1                                                           |
| Color Depth         | 10bit                                                            |
| Input               |                                                                  |
| 4×BNC               | 12G/6G/3G/HD/SD-SDI (SDI1/SDI2/SDI3/SDI4)                        |
| 1×HDMI              | HDMI 2.0                                                         |
| 1×SFP+              | SDI SFP+ input cage                                              |
| Output              |                                                                  |
| 4×BNC               | 12G/6G/3G/HD/SD-SDI (SDI1/SDI2/SDI3/SDI4)                        |
| 1×HDMI              | HDMI 2.0                                                         |
| Remote Interface    |                                                                  |
| 1×RJ45              | 10/100M Ethernet Input Interface                                 |
| 1×RJ45              | GPI Input Interface                                              |
| 2×RJ45              | RS422 Input and Loop Out Interface                               |
| Audio In & Out      |                                                                  |
| Audio In            | 16-Channels SDI & 2-Channel outputs                              |
| Audio Out           | 3.5mm Headset Jack, 2×3.0W Speakers<br>Support 4.1-Channel Audio |
| Audio Meter Display | Vertical/horizontal, transparent/opaque display                  |
| General             |                                                                  |
| Input Voltage       | AC 100-240V 50/60Hz                                              |
| Power               | ≤120W                                                            |
| Installation        | VESA MIS-D (100×100mm)                                           |
| Net Weight          | ≈11.7kg                                                          |
| Accessory           | Power Cord /Desktop Stand                                        |

\*Specifications may be changed without prior notice.


## FEATURES

### ▪ IPS LCD Panel, UHD/4K Resolution

Equipped with a 27-inch IPS LCD panel that features a 178° H/V wide viewing angle, accurate color reproduction, and fast response speed. It supports a 4K/UHD resolution of 3840×2160, with a pixel density that is four times that of Full HD, resulting in a more detailed picture quality.

### ▪ 4x12G-SDI Input/Loop Out, 4K/8K Monitoring

Equipped with 4x12G-SDI, 1xHDMI, and 1xSFP+ fiber optic interfaces. It supports 4x12G-SDI quad-link 8K input, 4x3G-SDI quad-link or 1x12G-SDI single-link 4K input. Quad-link input supports SQD and 2SI formats.

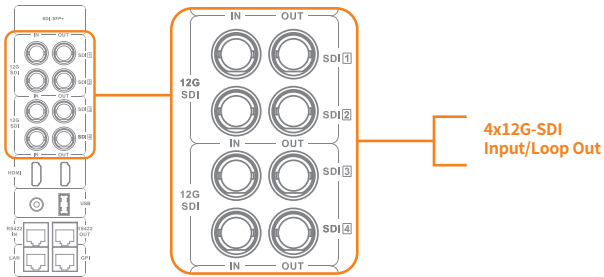

### ▪ Multiple HDR/Color Spaces Available

Supports high dynamic range (HDR) monitoring, providing standard HDR EOTF (Electro-Optical Transfer Function) with built-in various standard color spaces and Gamma. It also supports VPID reading display and Payload ID recognition, automatically matching color space and EOTF.

- Color Spaces: Rec.709/EBU/DCI-P3/DCI-P3 D65/Rec.2020
- HDR EOTF: HLG (1.03/1.11/1.16/1.20/1.27/1.33) · ST2084 PQ/(softroll)
- Gamma: 2.0/2.2/2.4/2.6

### ▪ Camera Gammas to Standard Gamuts Conversion

Built-in various mainstream camera gamma curves enable the conversion of camera color space and EOTF to standard color space and EOTF.



#### Camera Log:


- Arri Wide Gamut 3/LogC3
- Arri Wide Gamut 4/LogC4
- Canon Cinema Gamut/Canon Log2/3
- DJI D-Gamut/D-Log
- Panasonic V-Gamut/V-Log
- Sony S-Gamut/S-Log2
- Sony S-Gamut3/S-Gamut3.Cine/S-Log3

### ▪ 3D LUT Color Calibration

Tetrahedral 3D LUT interpolation color calibration technology. Compatible with ColourSpace and Calman calibration software, Konvision monitors apply K10-A/CR100 probe(professional level) to achieve a precise color. Monitor's also workable with universal colorimeters including CA210, CA310, CS200, CR100, CR250, X-Rite i1 Display.

### ▪ 4K HDR-HD SDR Down-Conversion

Single-link SDI can realize 4K-HD down-conversion and HDR-SDR conversion. Support NBCU LUTs, CMG LUTs production standards, to meet the 4K HDR and HD SDR high-quality production needs.

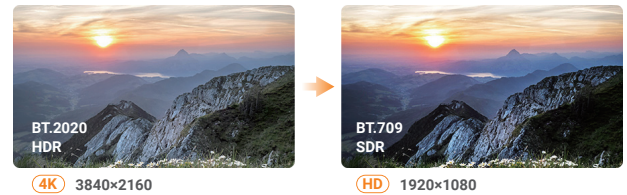


### ▪ Customizable 3D LUT Import & Output

Users can load and save 8 custom 3D LUTs via USB port/network port. Custom LUTs can also be set to output with the video display, effectively simplifying the color grading process for DIT and post-production work.

### ▪ Quad-View: Mixed Inputs & Frame Rates

The Quad view mode supports the simultaneous input of four different signal sources, allowing for mixed resolution and frame rate signals to be displayed together via SDI/HDMI/SFP+. Each split window can independently set Color Space and EOTF, as well as display HDR waveforms separately. This enables centralized monitoring of the entire system in a limited space, with the ability to quickly switch to a single view from any window.

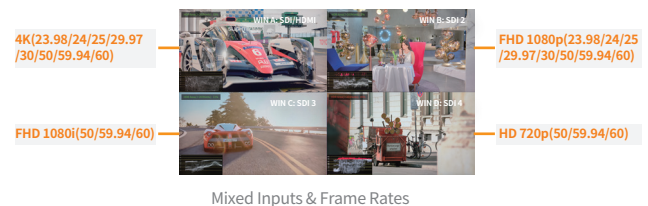

### ▪ HDR Area Display

Calculate and displays the percentage of HDR reference white (> 203 nits) and HDR-mapped white (> 260 nits) in the overall image. If exceeding the reference values, a warning will be issued.

### ▪ Professional Image Analysis Tools

