


KXM-6510S

65 INCH 4K HDR

QD-OLED MASTERING MONITOR

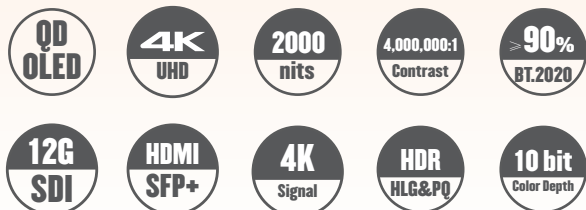

INTRODUCTION

KXM-6510S, 65inch 4K QD-OLED HDR mastering monitor, 3840×2160 4K resolution with dual 12G-SDI input/loop-out, upto support 4K signal. Sub-pixel independent light control, 4,000,000:1 ultra-high contrast ratio and can be used for up to 30,000 hours. Its color gamut can reach more than 99% of DCI-P3 and 90% of BT.2020. Slim body design, fully silent fanless, 0.1ms instantaneous response time is the priority choice for professional and high-quality 4K video live broadcast, shooting, post-production and other applications.

HIGHLIGHTS

- QD-OLED panel with 178° viewing angle and 3840×2160 4K resolution
- 2000nits peak brightness, 4,000,000:1 contrast, ≥90% BT.2020 coverage
- 12-bit video processing with zero-latency display
- Dual 12G-SDI & Dual 3G-SDI input/loop-out (4K single/quad-link)
- 4×3G-SDI Quad-link (SQD/2SI) supporting 4K60p
- 1×SFP+ fiber interface for SDI conversion input
- 1×HDMI 2.0 input, up to support 4096×2160P60Hz
- 3D LUT calibration compatible with ColourSpace/Calman
- Color spaces: Rec.709/EBU/DCI-P3/DCI-P3 D65/Rec.2020
- Gamma options: 2.0/2.2/2.4/2.6
- HDR support: HLG (1.03/1.11/1.16/1.20/1.27/1.33), ST2084 PQ/(softroll)
- VPID/Payload ID auto-recognition for color space/EOTF matching
- Multiple camera color space/EOTF conversions to standard color space
- USB/Ethernet for 3D LUT loading and firmware updates
- Quad-view mode for mixed SDI/HDMI/SFP+ signals with variable resolutions/-frame rates
- Independent gamuts/EOTF settings per window in quad-view mode
- Instant single-view switch from any window in quad-view mode
- 4K HDR to 2K SDR down-conversion with custom 3D LUT output
- HDR percentage analysis and pixel measurement
- Mirror/rotation/zoom/freeze/full scan/overscan/H/V delay
- Waveform/vectorscope/histogram/audio meter/audio phase
- False color/zebra/focus assist/Blue mode/mono mode
- Darkeness check/highlight check
- Each SDI support 16ch embedded audio meters & 2-channel outputs
- Supports 4.1-channel audio
- VITC1/2, LTC timecode; static/dynamic UMD/IMD; tri-color Tally
- 10 scene presets, 5 customizable shortcut keys
- GPI remote control for Tally/assist functions/scene preset
- Aluminum alloy casing, dual power inputs with speakers/headphone jack

SPECIFICATION


Panel	
Model No.	KXM-6510S
Backlight	QD-OLED self-luminous quantum dots
Size	65"
Resolution	3840×2160
Aspect Ratio	16:9
Viewing Angle	178°(H) / 178°(V)
Brightness	2000cd/m ² (peak brightness)
Contrast Ratio	4,000,000:1
Color Depth	10bit
Input	
4×BNC	12G/6G/3G/HD/SD-SDI (SDI1/SDI2) 3G/HD/SD-SDI (SDI1/SDI2)
1×HDMI	HDMI 2.0
1×SFP+	12G/6G/3G/HD/SD-SDI SFP+
Output	
4×BNC	12G/6G/3G/HD/SD-SDI (SDI1/SDI2) 3G/HD/SD-SDI (SDI1/SDI2)
Remote Interface	
1×RJ45	10/100M Ethernet Input Interface
1×RJ45	GPI Input Interface
2×RJ45	RS422 Input and Loop Out Interface
Audio In & Out	
Audio In	16-Channels SDI & 2-Channel outputs
Audio Out	3.5mm Headset Jack, 2×3.0W Speakers Support 4.1-Channel Audio
Audio Meter Display	Vertical/horizontal, transparent/opaque display
General	
Input Voltage	AC 100-240V 50/60Hz
Power	≤500W
Installation	VESA MIS-D (400×600mm)
Net Weight	≈48kg
Accessory	Power Cord

*Specifications may be changed without prior notice.

FEATURES

▪ 4K Resolution QD-OLED Self-Luminous Panel

Featuring RGB quantum dot self-luminous technology that precisely controls each sub-pixel's color percentage, delivering accurate color reproduction across all brightness levels. Achieves $\geq 90\%$ BT.2020 color gamut, 4,000,000:1 contrast percentage, and 2000nits peak brightness for exceptional shadow details.

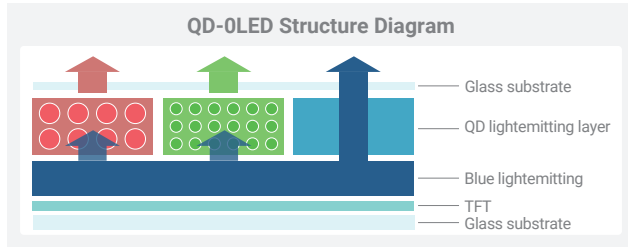


▪ 0.1ms Ultra-Fast Response to Eliminates Halo Effect

Konvision's QD-OLED master monitor achieves 0.1ms response time - significantly faster than LCD - effectively eliminating motion blur and judder in fast-moving content.


▪ 4x12G-SDI Input/Loop Out, 4K/UHD Monitoring

Equipped with 2x12G-SDI, 2x3G-SDI, 1xHDMI, and 1xSFP+ fiber optic interfaces. It supports 4x3G-SDI quad-link or 1x12G-SDI single-link 4K input. Quad-link input supports SQD and 2SI formats.

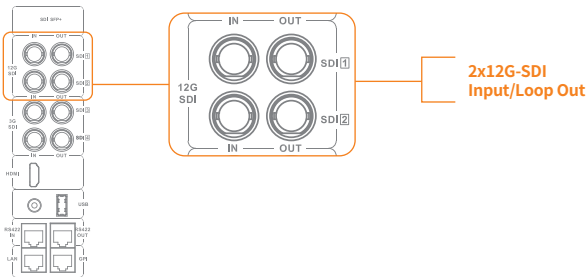

▪ Quad-View: Mixed Inputs & Frame Rates

The Quad view mode supports the simultaneous input of four different signal sources, allowing for mixed resolution and frame rate signals to be displayed together via SDI/HDMI/SFP+. Each split window can independently set Color Space and EOTF, as well as display HDR waveforms separately. This enables centralized monitoring of the entire system in a limited space, with the ability to quickly switch to a single view from any window.

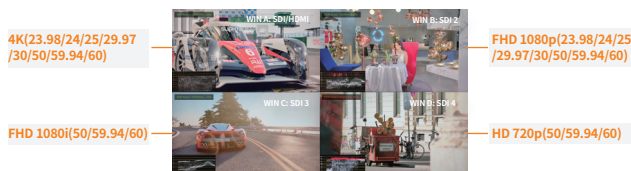

▪ Customizable 3D LUT Import & Output

Users can load and save 8 custom 3D LUTs via USB port/network port. Custom LUTs can also be set to output with the video display, effectively simplifying the color grading process for DIT and post-production work.

▪ Multiple HDR/Color Spaces Available

Supports high dynamic range (HDR) monitoring, providing standard HDR EOTF (Electro-Optical Transfer Function) with built-in various standard color spaces and Gamma. It also supports VPID reading display and Payload ID recognition, automatically matching color space and EOTF.

- Color Spaces: Rec.709/EBU/DCI-P3/DCI-P3 D65/Rec.2020
- HDR EOTF: HLG (1.03/1.11/1.16/1.20/1.27/1.33), ST2084 PQ/(softroll)
- Gamma: 2.0/2.2/2.4/2.6

▪ Camera Gammas to Standard Gamuts Conversion

Built-in various mainstream camera gamma curves enable the conversion of camera color space and EOTF to standard color space and EOTF.




Camera Log:

- Arri Wide Gamut 3/LogC3
- Arri Wide Gamut 4/LogC4
- Canon Cinema Gamut/Canon Log2/3
- DJI D-Gamut/D-Log
- Panasonic V-Gamut/V-Log
- Sony S-Gamut/S-Log2
- Sony S-Gamut3/S-Gamut3.Cine/S-Log3

▪ 4K HDR-HD SDR Down-Conversion

Single-link SDI can realize 4K-HD down-conversion and HDR-SDR conversion. Support NBCU LUTs, CMG LUTs production standards, to meet the 4K HDR and HD SDR high-quality production needs.

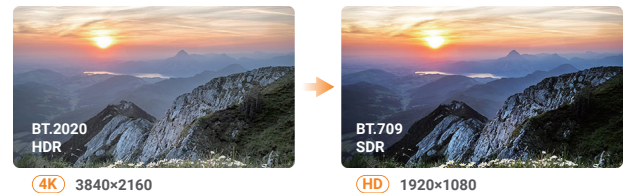

▪ Professional Image Analysis Tools

